


STAINLESS STEEL DOOR PULL INSTALLATION

(for 4010, 4019 & 8190 pulls)

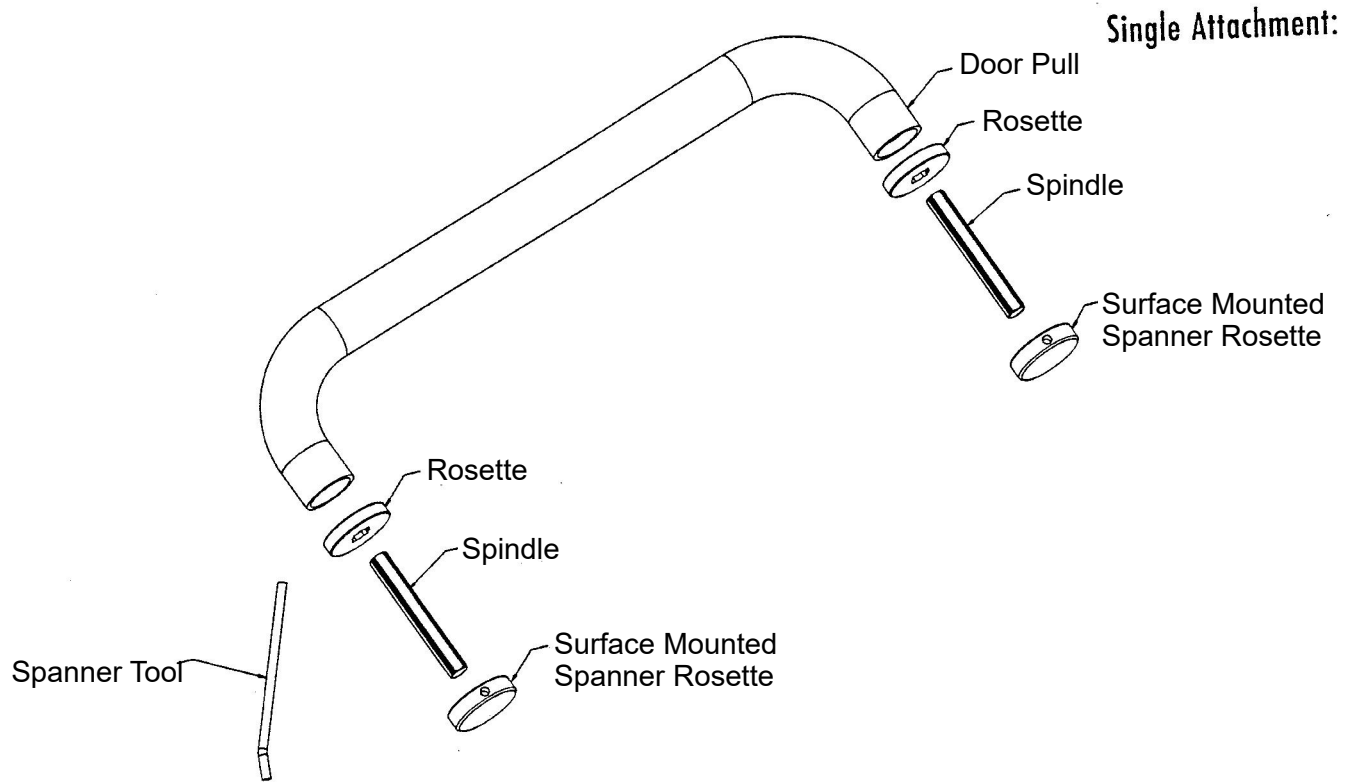

Assemble parts according to exploded view. Spindle fits through hole in door and protrudes on both sides. Affix the Surface Mounted Spanner Rosette to the end of Spindle on opposite side of door from the Door Pull. Insert the Spanner Tool in the hole on the side of the Surface Mounted Spanner Rosette and turn to tighten the assembly.